



KÖSTER

KÖSTER

// Overview

KÖSTER WP Mortar is a mineral, fiber-reinforced, fast setting, versatile, trowelable, reprofiling and waterproofing mortar. It is used for substrate preparation and is ideal for leveling, filling, and repair work on wall and floor surfaces, for example in basements, underground garages, or technical rooms.

KÖSTER WP Mortar is often used in combination with KÖSTER NB 4000, for example, to prepare a negative waterproofing or to form hollow channels or to prepare the substrate.

// Areas of application

- Basement waterproofing
- Water tanks and shafts
- Concrete repair
- Masonry and brickwork sealing
- Tunnels and underground structures
- Manholes and wastewater structures
- Creation of rounded fillets



KÖSTER at your service – worldwide.



DEUTSCHE
BAUCHEMIE



// Contact us

KÖSTER BAUCHEMIE AG
Dieselstraße 1-10 · 26607 Aurich
Tel.: +49 4941 9709 0
E-Mail: info@koster.eu
www.koster.eu

Follow us on social media:



Issued: 6/2025

KÖSTER WP Mortar

Waterproofing Mortar



Watertight and pressure-resistant

Good strength and durability


Versatile application



 **MADE IN
GERMANY**

// Key features at a glance

- Maximum grain size is 0.8 mm, the maximum layer thickness is 6 cm.
- Water addition reduced from approx. 5.0–5.5 liters to 4.0–4.5 liters
- The barrier mortar can be smoothed quickly and easily
- Good adhesive strength, ideal for repair and waterproofing works
- Working time is approx. 25 minutes
- Waterproof and very low-shrink mortar
- Faster hardening with earlier reworking, saving time especially on small construction sites
- Universally applicable
- Waterproof (WP): Developed for permanent waterproofing against water pressure
- Fiber-reinforced and fast-setting: Enables stable repairs and rapid substrate preparation
- Optimized formula for higher performance: Can be applied in a single coat up to 6 cm thick, improved smoothness, reduced water addition, higher adhesive strength, and extended processing time with fast curing.
- Can be used with KÖSTER NB4000 to create negative waterproofing barriers

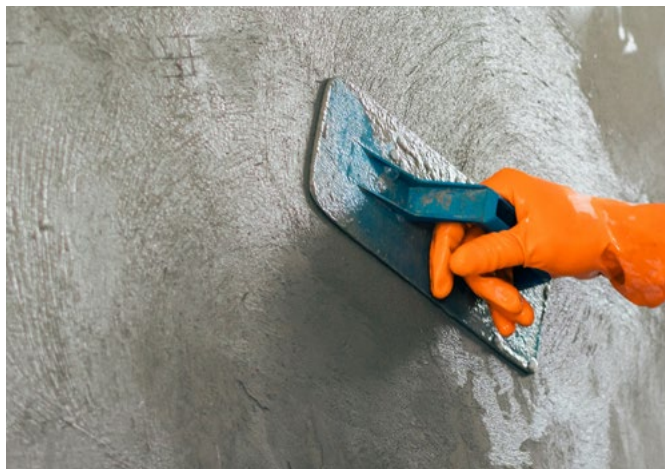

// Related products

KÖSTER WP Mortar

KÖSTER WP Mortar is a watertight, trowel applicable, fast setting mineral mortar for reprofiling surfaces and is resistant to pressurized water when applied in a layer thickness of min. 4 mm.



KÖSTER Polysil TG 500

KÖSTER Polysil TG 500 is a low viscous, substrate solidifying, hydrophobizing combination product on a polymer / silicate basis for the protection of mineral substrates.



KÖSTER NB 4000

KÖSTER NB 4000 is elastic and crack bridging and suitable for waterproofing in areas such as basements, foundation slabs, masonry, and the repair of defective waterproofing layers.

